

DM 10

Battery Powered Digital Pressure Gauge

Ceramic Sensor

class 0.5



Digital Pressure Gauge

DM 10

Nominal pressure

from 0 ... 1.6 bar
up to 0 ... 250 bar

Special characteristics

- ▶ adjustable housing
- ▶ LC display
4.5-digit 7-segment display
- ▶ standard battery CR 2450
operation period > 1.800 h

Functions

- ▶ min / max function with
reset function
- ▶ auto-zero
- ▶ setting of pressure unit
(bar, mbar, psi, MPa, mH₂O)
- ▶ automatic switch-off configuration



The compact low-cost digital pressure gauge DM 10 is battery-powered and has an adjustable housing; it is thus extremely suitable for mobile pressure monitoring.

The 4.5-digit LC-display indicates the battery status, the measurement value as well as the unit, this enables a fast and precise reading.

It is possible to switch between the most common units (bar, psi, Pa, MPa). Additional functions as auto-zero, min / max values and an automatic switching-off complete the DM 10 profile.

Preferred areas of use



Mobile Pressure Monitoring
Plant and Machine Engineering
Pneumatics / Hydraulics

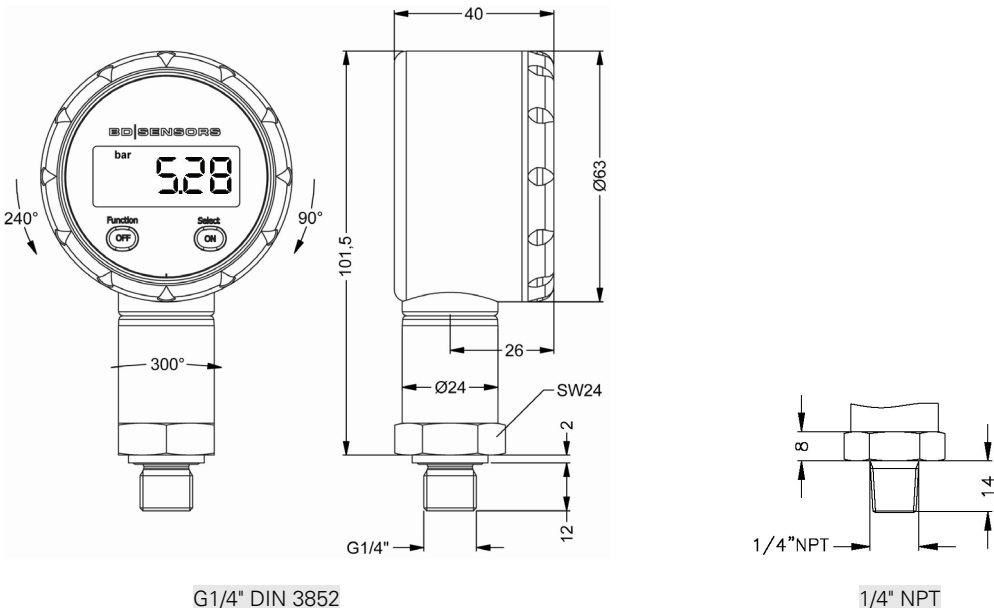


Environmental Engineering
(water – sewage – recycling)

Input Pressure													
Nominal pressure gauge [bar]	1.6	2.5	4	6	10	16	25	40	60	100	160	250	
Overpressure [bar]	4	4	10	10	20	40	40	100	100	200	400	400	
Burst pressure [bar]	7	7	15	15	35	70	70	150	150	250	450	450	
Vacuum resistance	unlimited												

Performance			
Accuracy	≤ ± 0.5 % FSO BFSL		
Measuring rate	1/sec		
Long term stability	≤ ± 0.3 % FSO / year		
Thermal effects (Offset and Span)			
Tolerance band	≤ ± 0.5 % FSO / 10 K (typ.)		in compensated range 0 ... 50 °C
Permissible temperatures			
Permissible temperatures	medium: -25 ... 85 °C	environment: 0 ... 70 °C	storage: 0 ... 70 °C
Materials			
Pressure port / housing	stainless steel 1.4301		
Display housing	PA 6.6, Polycarbonate		
Seals (media wetted)	FKM		others on request
Diaphragm	ceramics Al ₂ O ₃ 96 %		
Media wetted parts	pressure port, seals, diaphragm		
Miscellaneous			
Display	LC-Display, visible range 36 x 15 mm; 4.5-digit 7-segment-display, digit size 8.5 mm, range of indication ±19999		
Electromagnetic compatibility	emission and immunity according to EN 61326		
Supply	3 V lithium battery (CR 2450)		
Data storage	EEPROM (non-volatile)		
Ingress protection	IP 65		
Installation position	any		
Weight	plastic: approx. 150 g		
Operational life of battery	min. 1500 h with permanent operation		
Mech. operational life	> 100 x 10 ⁶ pressure cycles		
CE-conformity	EMC directive: 2004/108/EC		pressure equipment directive: 97/23/EC (Modul A) ¹

¹This directive is only valid for devices with maximum permissible overpressure > 200 bar.

Dimensions (in mm)	
display housing plastic  G1/4" DIN 3852 1/4" NPT	

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

Ordering code DM 10

DM 10

_____-_____-0-_____-0 K 0-_____-_____-_____-_____-_____-_____-_____-_____-

[illegible]