

DMP 304



Industrial Pressure Transmitter for very high Pressure

accuracy according to IEC 60770:
standard: 0.5 % FSO
option: 0.25 % FSO

DMP 304 High Pressure Transmitter

Nominal pressure ranges

from 0 ... 2 000 bar
up to 0 ... 6 000 bar

Output signals

2-wire: 4 ... 20 mA
3-wire: 0 ... 10 V (on request)

Special characteristics

- ▶ adjustability of offset and span via front sided potentiometers
- ▶ pressure port 9/16" UNF
- ▶ 80 % calibration signal with MIL / Bendix plug

Optional versions

- ▶ IS-version:
Ex ia = intrinsically safe for gases
- ▶ Accuracy according to IEC 60770:
0.25 % FSO
- ▶ pressure port M20x1.5 and M16x1.5



The high-pressure transmitter type DMP 304 has been especially designed for applications with highest demand on precision and reliability. DMP 304 series is based on a compensated strain gauge, bonded onto a stainless steel diaphragm.

Due to the rugged stainless steel housing usage under extreme conditions and in IS-required areas is no problem.

Preferred areas of use are



hydraulic circuits

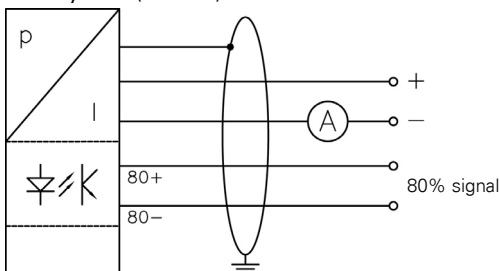
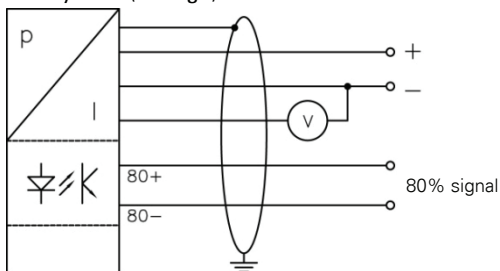




water jet torching




high pressure applications in chemical and petrochemical industry

Input pressure range					
Nominal pressure gauge	[bar]	2 000	4 000	5 000	6 000
Overpressure	[bar]	3 000	5 000	6 000	7 000
Burst pressure	[bar]	4 000	8 000	10 000	10 000
Output signal / Supply					
Standard	2-wire:	4 ... 20 mA / V _s = 10 ... 30 V _{DC}			
IS-protection	2-wire:	4 ... 20 mA / V _s = 10 ... 28 V _{DC}			
Option 3-wire (on request)	3-wire:	0 ... 10 V / V _s = 14 ... 36 V _{DC}			
Performance					
Accuracy		IEC 60770 ¹			
	standard:	≤ ± 0.50 % FSO			
	option:	≤ ± 0.25 % FSO (on request)			
Permissible load	current 2-wire:	R _{max} = [(V _s - V _{s min}) / 0.02] Ω			
	voltage 3-wire:	R _{min} = 10 kΩ			
Influence effects	supply 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ				
Long term stability	≤ ± 0.2 % FSO / year				
Response time	< 2.5 msec				
Adjustability	Via a front sided potentiometer is an adjustment of the offset possible within the range of ± 5 % of the nominal pressure range, without an influence of characteristic curve and accuracy.				
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)					
Calibration (only with MIL / Bendix plug)					
Calibration signal accuracy	≤ ± 0.25 % FSO				
Calibration	80 % FSO calibration (e.g. for 4 ... 20 mA / 2-wire: signal = 0.8*16 mA + 4 mA = 16.8 mA)				
Thermal effects (Offset and Span)					
Thermal error	≤ ± 0.2 % FSO / 10 K in compensated range -20 ... 85 °C				
Permissible temperatures					
Permissible temperatures	medium:	-40 ... 85 °C			
	electronics / environment:	-25 ... 85 °C			
	storage:	-40 ... 85 °C			
Electrical protection					
Short-circuit protection	permanent				
Reverse polarity protection	no damage, but also no function				
Electromagnetic compatibility	emission and immunity according to EN 61326				
Mechanical stability					
Vibration	10 g RMS (20 ... 2000 Hz)				
Shock	100 g / 11 msec				
Materials					
Pressure port / diaphragm	stainless steel 1.4548 (17-4 PH)				
Housing	standard: stainless steel 1.4301 (304)				
Seals (media wetted)	none (welded version)				
Media wetted parts	pressure port, diaphragm				
IS-protection (for 2-wire in IS-version) in preparation					
Approval DX17-DMP 304	zone 0: II 1G Ex ia IIC T4				
Safety technical maximum values	U _i = 28 V, I _i = 93 mA, P _i = 660 mW				
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar zone 1 and higher: -25 ... 70 °C				
Connecting cables (by factory)	cable capacity:	signal line/shield as well as signal line/signal line: 160 pF/m			
	cable inductance:	signal line/shield as well as signal line/signal line: 1 µH/m			




Miscellaneous						
Insulation strength / resistance	standard: insulation strength 100 MΩ @ 35 V IS-version: insulation resistance 100 MΩ @ 35 V _{DC} 100 MΩ @ 500 V _{AC} (relative to housing)					
Current consumption	2-wire signal output current: max. 28 mA 3-wire signal output voltage: max. 15 mA					
Weight	approx. 260 g					
Installation position	any					
CE-conformity	EMC Directive: 2004/108/EC Pressure Equipment Directive: 97/23/EC (module A)					
Wiring diagrams						
2-wire-system (current) 	3-wire-system (voltage) 					
Pin configuration						
Electrical connections	Binder 723 (5-pin)	M12x1 (4-pin)	ISO 4400	cable colours (DIN 47100)		
Supply +	3	1	1	wh (white)		
Supply -	4	2	2	bn (brown)		
Signal + (only for 3-wire)	1	3	3	gn (green)		
Shield	5 4	ground	pin	gn/ye (green / yellow)		
Pin configuration MIL / Bendix plug (optional)						
Version	Pin A	Pin B	Pin C	Pin D	Pin E	Pin F
2-wire current signal 4 ... 20 mA	supply +/- signal +	supply -/ signal -	-	-	calibration +	calibration -
3-wire	signal +	supply - / signal - / calibration -	supply +	-	-	calibration +

Electrical connections (dimensions in mm)



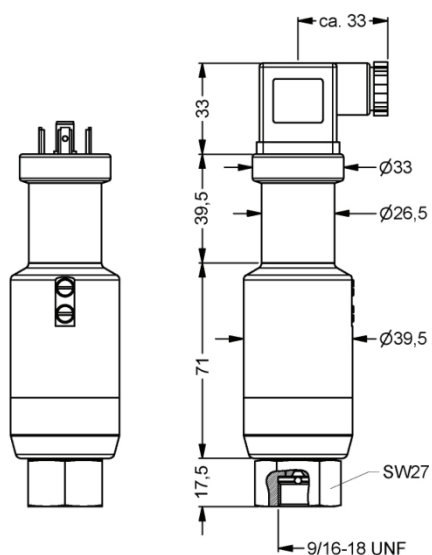
Binder series 723 (IP 67)



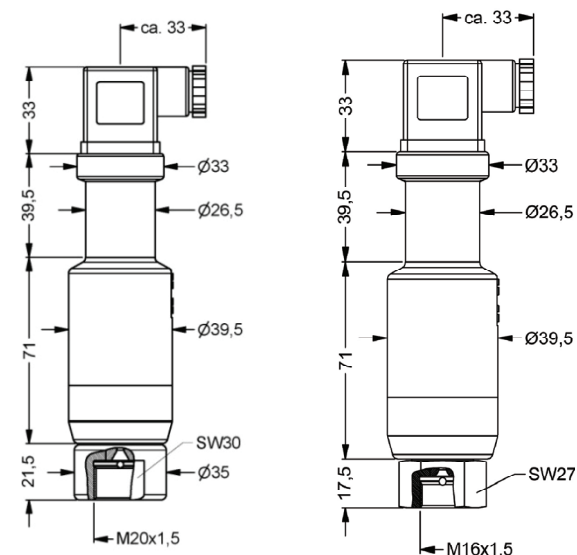
M12x1 4-pin (IP 67)

cable outlet with PVC-cable (IP 67) ²

ISO 4400 (IP 65)

cable outlet (IP 68) ³MIL / Bendix plug
(Typ PT 02 A 10-6 P)² Standard: 2 m PVC-cable (permissible temperature: -5 ... 70 °C)³ different cable types and lengths available, permissible temperature depends on kind of cable**Mechanical connection (dimensions in mm)****Standard**

9/16" UNF internal thread

Option

M20x1.5 internal thread

M16x1.5 internal thread

Ordering code DMP 304

DMP 304

			-					-		-		-				-				-			
--	--	--	---	--	--	--	--	---	--	---	--	---	--	--	--	---	--	--	--	---	--	--	--

Pressure						
	gauge	2	2	0		
Input						
	[bar]					
	2 000	2	0	0	4	
	4 000	4	0	0	4	
	5 000	5	0	0	4	
	6 000	6	0	0	4	
	customer	9	9	9	9	
Output						
	4 ... 20 mA / 2-wire				1	
Intrinsic safety	4 ... 20 mA / 2-wire				E	
	0 ... 10 V / 3-wire				3	
	customer				9	
Accuracy						
standard	0.5 %				5	
option	0.25 %				2	
	customer				9	
Electrical connection						
	Male and female plug ISO 4400				1	0 0
	Male plug Binder series 723 (5-pin)				2	0 0
	Cable outlet with PVC-cable ¹				T	A 0
	Cable outlet ²				T	R 0
	Male plug M12x1 (4-pin)				M	0 0
	MIL-/Bendix (Typ PT 02 A 10-6 P)				B	G 0
	customer				9	9 9
Mechanical connection						
	9/16" UNF internal thread				V	0 0
	M16x1.5 internal thread				P	0 0
	M20x1.5 internal thread				D	2 8
	customer				9	9 9
Special version						
	standard					0 4 1
	customer					9 9 9

¹ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C), optionally cable with ventilation tube

² different cable types and lengths deliverable (permissible temperature depends on kind of cable)