

## di 32 / di 08

**Digital microprocessor indicators  
with 1 measurement input  
and a maximum of 3 signal outputs,  
case for flush-panel mounting to DIN 43 700**

### Brief description

The single-channel digital indicators with the bezel sizes 48mm x 24mm and 96mm x 48mm are available for displaying measurements and monitoring limit values in industrial applications.

The configurable analog input permits the direct connection of thermocouples, resistance thermometers, resistance transmitters, potentiometers or transducers with a standard signal. The sampling rate for the measurement input is 4 measurements per second.

The indicators have a clearly legible 4-digit LED display which, depending on the version, is 10mm (di 32) or 20mm (di 08) high, and serves to display the measurements, as well as being available for dialogs. Only three buttons are used for configuration. The parameter setting is arranged dynamically, and after two seconds without any operation the value is accepted automatically.

The front protection is to IP66, at the rear IP20. The electrical connection is by plug-in screw terminals. The possible input and output configurations are shown in the following block structure.



Type 951530/...



Type 951531/...

### Block structure

#### Signal input

Thermocouples  
Type L, J, U, T, K, E,  
N, S, R, B, D, C

Resistance thermometer  
Pt100, Pt1000, KTY11-6

Resistance transmitter,  
Potentiometer

Current  
0–20mA, 4–20mA

Voltage  
0–10V, 2–10V

#### Logic input

via floating contact

on Type 951530/...  
alternatively configurable  
to output 2

on Type 951531/...  
available as standard

#### Supply

10–18V DC  
or  
20–53V AC/DC 48–63Hz  
or  
110–240V AC 48–63Hz

#### Output 1

Relay (n.o. make)  
230V 3A

Response to probe break  
is configurable

#### Output 2

on Type 951530/...  
Logic output 0/5V  
alternatively configurable  
to logic input

on Type 951531/...  
Relay (n.o. make) and  
parallel logic output 0/5V

Response to probe break  
is configurable

### Features

- structured operating and programming layout
- customer-specific linearization correction
- 2 limit comparators for limit monitoring
- digital input filter with programmable filter time constant
- time-delayed switching, programmable per relay
- switch-on delay after power-on is programmable

## Technical data

### Input for thermocouple

Designation		Range limits	Range	Measurement accuracy in range	Ambient temperature error
Fe-Con	L	EN 60 584	-200 + 900°C -210 +1200°C	-200 + 900°C -200 +1200°C	≤0.4% ≤0.4%
Cu-Con	J		-200 + 600°C	-200 + 600°C	100 ppm/°C
Cu-Con	U		-270 + 400°C	-200 + 400°C	100 ppm/°C
NiCr-Ni	T	EN 60 584	-270 +1372°C	-200 +1372°C	100 ppm/°C
NiCr-Con	K	EN 60 584	-270 +1000°C	-150 +1000°C	100 ppm/°C
NiCrSi-NiSi	E	EN 60 584	-270 +1300°C	-100 +1300°C	100 ppm/°C
Pt10Rh-Pt	N	EN 60 584	-50 +1768°C	0 — 1768°C	100 ppm/°C
Pt13Rh-Pt	S	EN 60 584	-50 +1768°C	0 — 1768°C	100 ppm/°C
Pt30Rh-Pt6Rh	R	EN 60 584	0 — 1820°C	+300 +1820°C	100 ppm/°C
W3Re-W25Re	B	EN 60 584	0 — 2495°C	0 — 2495°C	100 ppm/°C
W5Re-W26Re	D		0 — 2320°C	0 — 2320°C	100 ppm/°C
	C				
Sampling rate		4 measurements per second			
Cold junction		Pt100 internal or external constant (CJT)			
Decimal place		configurable			

### Input for resistance thermometer

Designation		Connection circuit	Range	Measurement accuracy	Ambient temperature error
Pt100	EN 60 751	2-wire	-200 +850°C	≤0.1%	50 ppm/°C
Pt100	EN 60 751	3-wire	-200 +850°C	≤0.1%	50 ppm/°C
Pt1000	EN 60 751	2-wire	-200 +850°C	≤0.1%	50 ppm/°C
Pt1000	EN 60 751	3-wire	-200 +850°C	≤0.1%	50 ppm/°C
KTY11-6		2-wire	-50 +150°C	≤1.0%	50 ppm/°C
Sensor lead resistance		20Ω max. per lead in 2-wire and 3-wire circuit			
Measuring current		250µA			
Lead compensation		not required for 3-wire circuit. For 2-wire circuit, lead compensation can be implemented in software through actual-value correction.			
Decimal place		configurable			

= factory setting

### Input for resistance transmitter

Designation		Range	Measurement accuracy	Ambient temperature error
0 — 4kΩ		0 — 4kΩ	≤0.5%	50 ppm/°C
Sensor lead resistance		20Ω max. per lead		
Measuring current		25µA or 250µA (depending on size of resistance)		
Decimal place		configurable		

### Input for potentiometer

Designation		Connection circuit	Range	Measurement accuracy	Ambient temperature error
0 — 4kΩ		2-wire	0 — 4kΩ	≤0.4%	50 ppm/°C
0 — 4kΩ		3-wire	0 — 4kΩ	≤0.4%	50 ppm/°C
Sensor lead resistance		20Ω max. per lead in 2-wire and 3-wire circuit			
Measuring current		250µA			
Lead compensation		not required for 3-wire circuit. For 2-wire circuit, lead compensation can be implemented in software through actual-value correction.			
Decimal place		configurable			

**Input for standard signals**

Designation	Range	Measurement accuracy	Ambient temperature error
Voltage	0 — 10V, input resistance $R_E > 100\text{k}\Omega$ 2 — 10V, input resistance $R_E > 100\text{k}\Omega$	$\leq 0.1\%$ $\leq 0.1\%$	100 ppm/ $^{\circ}\text{C}$ 100 ppm/ $^{\circ}\text{C}$
Current	4 — 20mA, voltage drop $\leq 1\text{V}$ 0 — 20mA, voltage drop $\leq 1\text{V}$	$\leq 0.15\%$ $\leq 0.15\%$	100 ppm/ $^{\circ}\text{C}$ 100 ppm/ $^{\circ}\text{C}$
Decimal place	configurable		

**Measurement circuit monitoring<sup>1</sup>**

Transducer	Out-of-range	Probe/lead short-circuit <sup>1</sup>	Probe/lead break
Thermocouple	•	-	•
Resistance thermometer	•	•	•
Resistance transmitter	•	•	•
Potentiometer	•	-	•
Voltage 2 — 10V 0 — 10V	• •	• -	• -
Current 4 — 20mA 0 — 20mA	• •	• -	• -

<sup>1</sup> In fault condition, the outputs move to a defined state (configurable: active or inactive).

- recognized
- not recognized

**Logic input**

Assignment	Type 951530/...	Type 951531/...
Number	1 (instead of the logic output only)	1 (standard)
Function (configurable)		Hold, Min/Max reset, level inhibit
Operation		through floating contact

**Outputs**

Assignment	Type 951530/...	Type 951531/...
Output 1	relay	relay
Output 2	logic output or logic input	relay and parallel logic output
Relay contact rating contact life		make contact (n.o.) 3A at 230VAC resistive load 150,000 operations at rated load
Logic output current limiting load resistance		0/5V 20mA $R_{load} \geq 250\Omega$
Feature		time-delayed switching of relays separately programmable per relay within the range 0 — 9999 sec

= factory setting

**Switch-on delay**

Switch-on delay after power ON	programmable within the range 4 — 9999 sec
Feature	display and relays will only be activated after the programmed time has elapsed

**Electrical data**

Supply (switch-mode power supply)	10 — 18V DC $\pm 0\%$ or 110 — 240V AC -15/+10% 48 — 63Hz, or 20 — 53V AC/DC 48 — 63Hz
Test voltages (type test)	to EN 61 010, Part 1, March 1994, overvoltage category II, pollution degree 2, for Type 951530/... overvoltage category III, pollution degree 2, for Type 951531/...
Power draw	3VA max.
Data backup	EEPROM
Electrical connection	at the rear, via plug-in screw terminals, conductor cross-section $\leq 1.5\text{mm}^2$ (1.0mm <sup>2</sup> for Type 951530/...) or 2x 1.5mm <sup>2</sup> (1.0mm <sup>2</sup> for Type 951530/...), with core end sleeves
Electromagnetic compatibility	EN 61 326, NAMUR recommendation NE21 (5/93)
Safety regulation	to EN 61 010-1

**Case**

Case type	plastic case for panel mounting to DIN 43 700	
Size in mm (for Type)	Type 951530/...	Type 951531/...
Bezel	48 x 24	96 x 48
Depth behind panel	100	70
Panel cutout	45 <sup>+0.6</sup> x 22.2 <sup>+0.3</sup>	92 <sup>+0.8</sup> x 45 <sup>+0.6</sup>
Ambient/storage temperature range	0 — 55°C / -40 to +70°C	
Climatic conditions	$\leq 75\%$ rel. humidity, no condensation	
Operating position	any	
Protection	to EN 60 529, front IP66, rear IP20	
Weight	75g approx.	160g approx.


**Displays and controls**

(1) Display	7-segment display, 4 digits, red	
Height of digits	Type 951530/...: 10mm, Type 951531/...: 20mm	
Display range/unit	-1999 to +9999 digit / °C/°F	
Decimal places	none, one, two	
(2) Status indicators	two LEDs for the outputs 1 and 2, yellow	
(3) Buttons	P select next parameter, select parameter and configuration level (> 2sec) ▲, ▼ increase <sup>1</sup> , decrease <sup>1</sup> parameter value P + ▼ instant return to basic status	


<sup>1</sup> Dynamic value setting: automatic acceptance of value after two seconds without pressing a button (also configuration codes)

## Connection diagrams

Type 951530/...

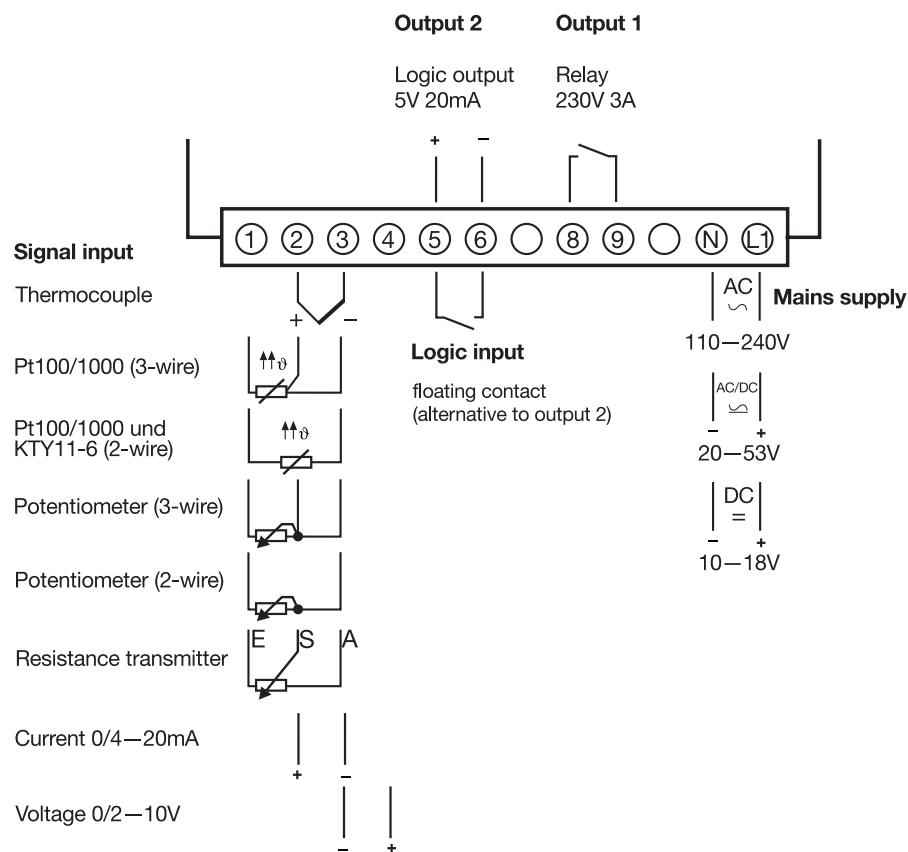


Type 951531/...


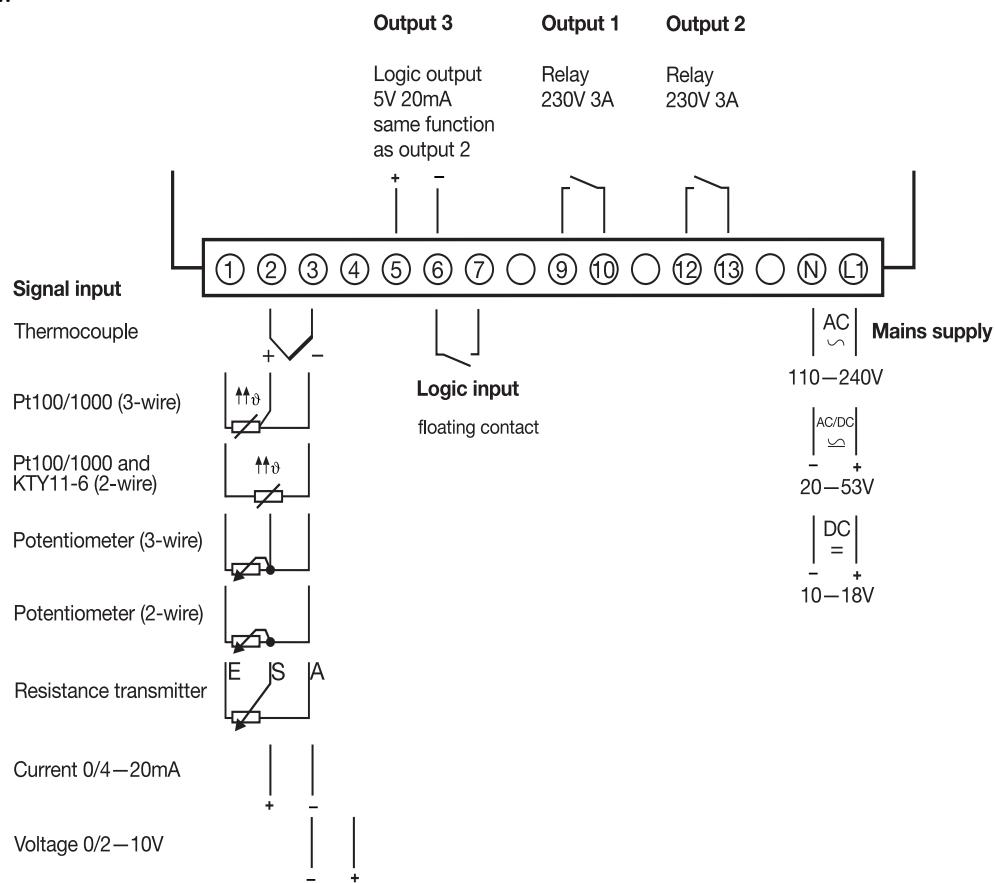


## Dimensions

Type 951530/...

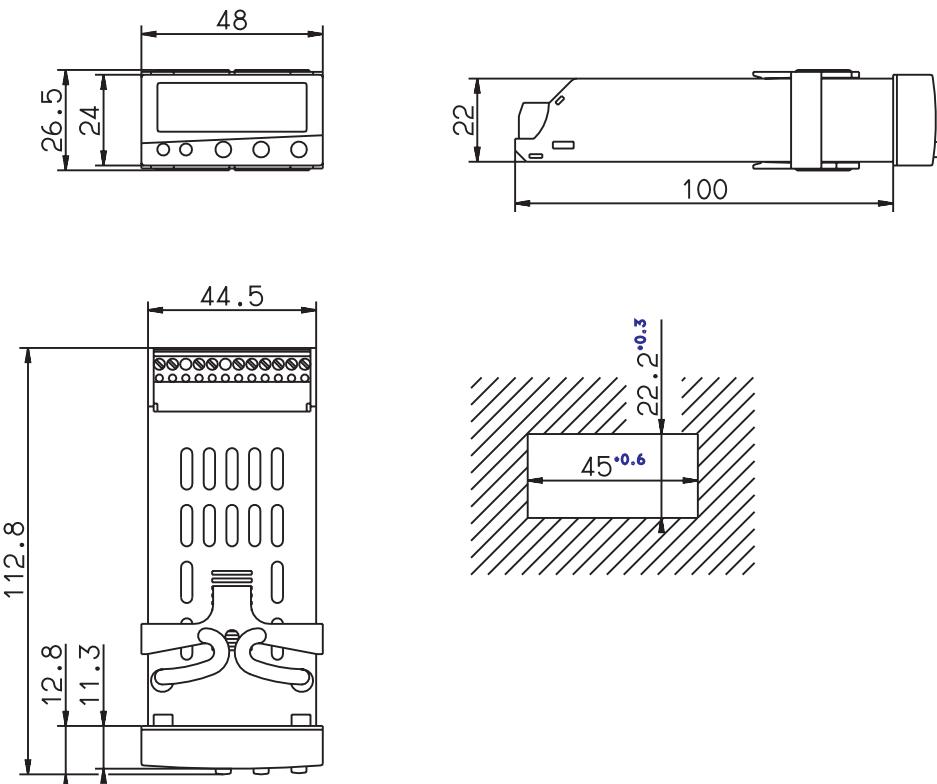

Type 951531/...

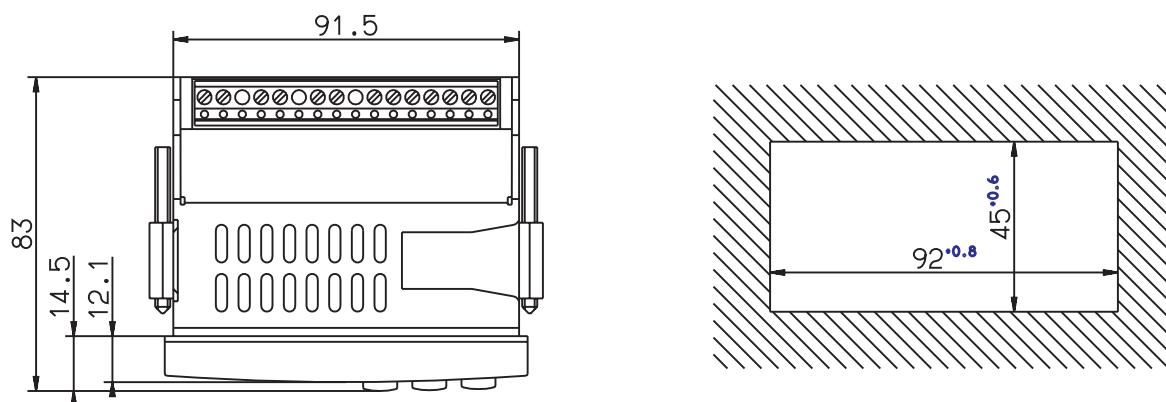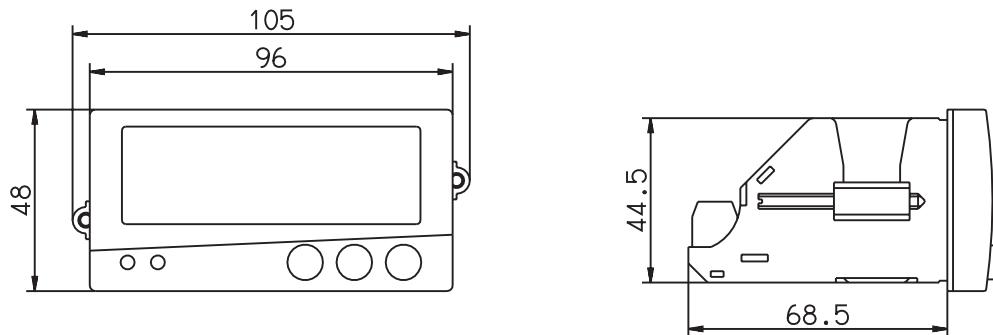

**Side-by-side mounting (minimum spacing of panel cutouts)**

Type	horizontal	vertical
951530/...	> 8mm	> 8mm
951531/...	> 10mm	> 10mm

**Order details:** Digital microprocessor indicators  
with 1 measurement input and a maximum of 3 signal outputs,  
case for flush-panel mounting to DIN 43 700

**(1) Basic version**

951530/ di32 - size 48mm x 24mm

951531/ di08 - size 96mm x 48mm

**(2) Input (programmable)**

x x      888      factory-set  
x x      999      configuration to customer specification<sup>1</sup>

**(3) Supply**

x x      16      10 — 18V DC ±0%  
x x      22      20 — 53V AC/DC 48 — 63Hz  
x x      23      110 — 240V AC +10/-15% 48 — 63Hz

Order code

(1) [ ] / (2) [ ] - (3) [ ]

Order example

951530 / 888 - 23

<sup>1</sup> For configuration to customer specification, please specify the probe type and the required settings in plain text.

**Standard accessories**

- 1 Operating Instructions B 95.1530
- 1 set of mounting brackets
- 1 seal